

# PLOTTER – CUT MATERIALS


## SOFT METALLIC – SERIES

### ▶ PRODUCT DESCRIPTION

It is light-weight, high elastic and looks great on t-shirts.

※ Recommended Fabrics : Cotton, Polyester, Poly/Cotton Blends

| No. | DIVISION | LAYER                      | NOTE           |
|-----|----------|----------------------------|----------------|
| 1   | Carrier  | Skin Protective Film       | PET : Glossy   |
| 2   | Skin     | Foil Film                  | Color : Normal |
| 3   | Hotmelt  | Polyester Hotmelt Adhesive | Color : Opaque |

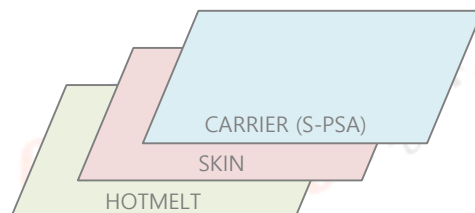

### ▶ HOW TO USE

※ Products in the "HOW TO USE" image may vary.

| 1. SET MATERIAL   | 2. SELECT DESIGN  | 3. CUTTING  | 4. WEEDING  |
|---|---|---|---|
|   |   |   |   |
| Feed into cutter so that the material is on the bottom.   | Select and run the desired design.  | Words or numbers must be in reverse (mirror image). | Weed away excess material leaving only the desired graphic. |
| 5. PREHEAT & POSITION   | 6. APPLY HEAT   | 7. PEEL OFF CARRIER                                 | 8. COMPLETION   |
|   |   |   |   |
| Preheat the garment for 3 seconds, prior to application. Position & place cover sheet over graphic. | <ul style="list-style-type: none"> <li>▶ Temperature : 150°C</li> <li>▶ Time : 10sec</li> <li>▶ Pressure : 34±2 psi (Medium)</li> </ul> | <b>COOL PEEL</b><br>Peel off once cooled.           | Completion  |

### ▶ CUTTER GUIDELINES

| PLOTTER      | BLADE | FORCE    | OFFSET  | SPEED    | DEPTH     |
|--------------|-------|----------|---------|----------|-----------|
| Roland GX-24 | 45°   | 60~80g/f | 0.250mm | 15cm/sec | 0.1~0.2mm |

### ▶ USAGE GUIDE

|                  |   |
|------------------|---|
| Storage          | Store at room temperature (temperature: 20 ± 5 °C, humidity: 35 ± 15%) and avoid exposure to direct sunlight.   |
| Cutting Notes    | You should always test cut prior to any production run.<br>Hot melt layer separation may occur depending on your cutting blade and working conditions |
| Weeding Notes    | It is necessary to pay attention to the operator when removing the pattern after confirming the cutting conditions.                                   |
| Press & Peel off | Adhere to conditions outlined above in steps 6 and 7.   |
| Washing Notes    | Be aware of potential damage due to washing conditions, and laundry products.   |

This document is based upon Chang Dae hotmelt sheet quality system & quality system procedures. Chang Dae hotmelt sheet will supply a copy to the customer after investigation and approval.

▶ Headquarters : 258-26, Yangyeonro, Eunhyeonmyeon, Yangjushi, Gyeonggi-do, Republic of Korea [TEL : (82)31-859-7418~9, FAX : (82)31-859-7417]  
▶ Seoul office : 25, Eonju-ro 168-gil, Gangnam-gu, Seoul, Republic of Korea [☎(82)02-3444-7419]



**CHANG DAE HOTMELT SHEET Co., Ltd.**